


C=cilindro
V=válvula

Pressão máxima: 400 Bar

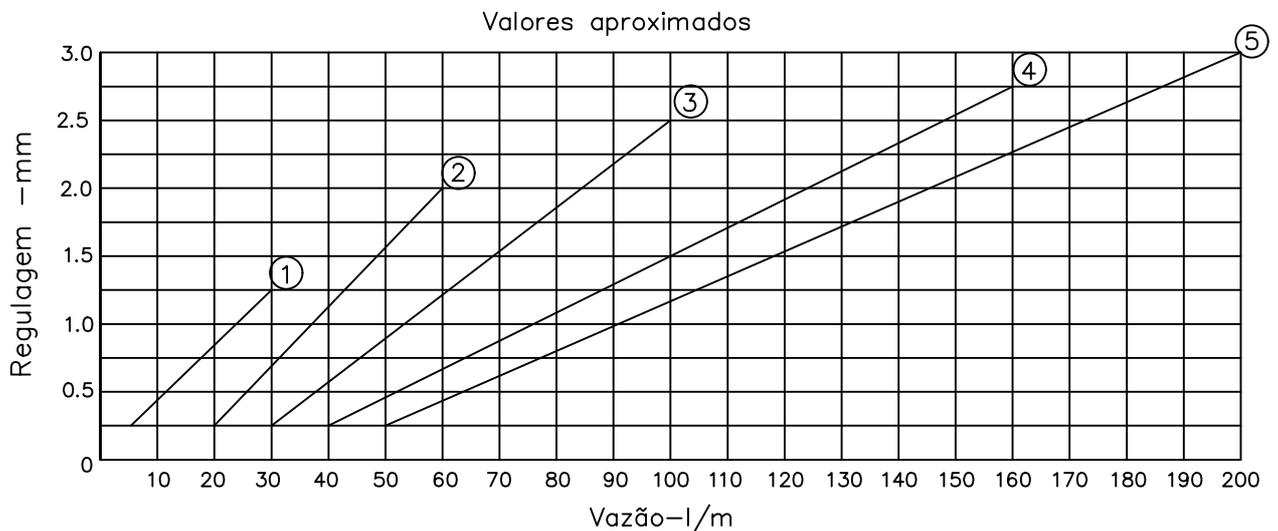

① 1/4"G-SAE5 ② 3/8"BSP-SAE6 ③ 1/2"G-SAE8 ④ 3/4"BSP-SAE10 ⑤ 1"G-SAE12

200009-I	1"G (1"BSP)	200 l/m	35	20
200009-H	9/16"-18UNF(SAE6)	60 l/m	28	12
200009-G	1.1/16"-12UN(SAE12)	200 l/m	35	20
200009-F	3/4"G (BSP)	160 l/m	35	20
200009-E	1/2"G (BSP)	100 l/m	28	14
200009-D	3/8"G (BSP)	60 l/m	28	12
200009-C	1/4"G (BSP)	30 l/m	28	12
200009-B	7/8"-14UNF(SAE10)	160 l/m	28	14
200009-A	3/4"-16UNF(SAE8)	100 l/m	28	14
Código	Rosca	Vazão máx.	A	B

Material:		Tol.Geral:		Des.: ORV			
Dimensão Bruta:		Acab.Geral:		Apr.: Otavio.			
Cementar:	Temperar:		Esc.: 1:1	Data: 10/03/08	Data:	Alterações: :	
Control Star		Denominação: Válvula de Bloqueio			Código: Ver tabela		Rev.: